

manufacturer test report


testing according to DIN EN 50164-1 (VDE 0185 part 201)

MV Terminal Part No. 392 050

material: hot-galvanized steel



DEHN + SÖHNE

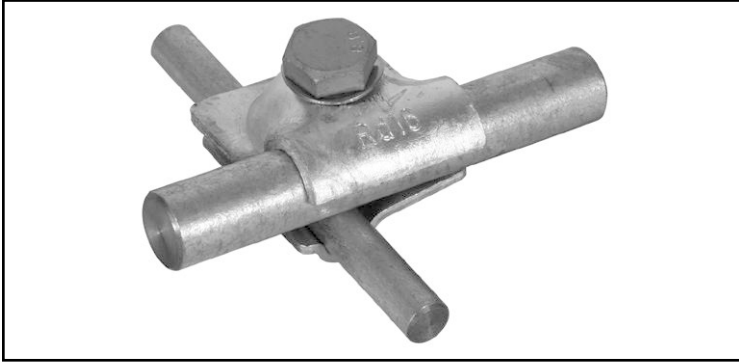

non-binding figure

application: overground

| conductor connected | test result |
|---|-------------|
| 1st conductor : round wire 8 stainless steel 2nd conductor : round wire 16 stainless steel | H |
| 1st conductor : round wire 8 aluminium 2nd conductor : round wire 16 aluminium | H |
| 1st conductor : round wire 8 hot-galvanized steel 2nd conductor : round wire 16 hot-galvanized steel | H |

caption

withstand lightning current class H 100 kA (10/350 μ s)

withstand lightning current class N 50 kA (10/350 μ s)

Detailed data of testing conditions can be requested on demand.